
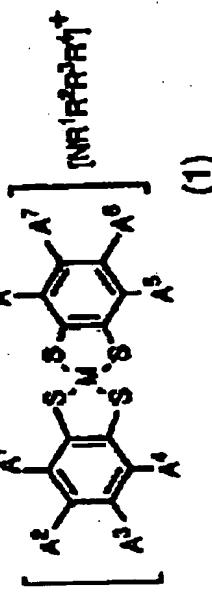
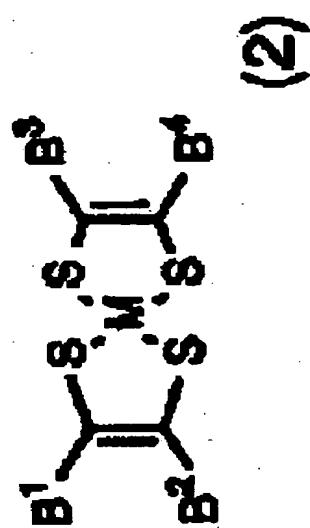


| | | |
|---|--|---|
| 95-260633/34 MTSUI TOATSU CHEM INC 93.12.17 93JP-317811 (95.06.27) B41M 3/14, B42D 15/10, C09D 11/00, C09K 3/00 | E23 G02 *JP 07164729-A | MITK 93.12.17 *JP 07164729-A |
| Security ink print with excellent light resistance. - which forms protective layer contg. UV emulsion absorbed in specified range on printing layer contg. IR light absorbing pigment C95-118558 | A ¹ - A ⁸ = H, halogen, nitro, cyano, thiocyanate, cyanate, acyl, carbamoyl, alkylamino carbonyl, alkoxy carbonyl, aryloxy carbonyl, subst. or unsubstd. alkyl, ary1, alkoxy, aryloxy, alkylthio, aryliithio, alkyl amino or aryl amino; R ¹ - R ⁴ = subst. or unsubstd. alkyl or aryl; M = metallic atom of 2 values, contg. metallic atom of 3 or 4 values or oxy metal. | E(23-B, 25) G(2-A4A) |
| A security ink print forms a protective layer contg. ultra violet emulsion absorbed in the range of 250nm to 400nm on a printing layer contg. near infrared ray absorbing pigment. Also claimed is that the near infrared ray absorbing pigment is at least one of dithiol cpd. of formula (1), dithiol cpd. of formula (2), phthalocyanine cpd. of formula (3); |  |  |

carbonyl, aryloxy carbonyl, subst. or unsubst. alkyl, aryl;
M = metallic atom of 2 values, subst. metallic atom of 3 or 4 values
of oxy metal.

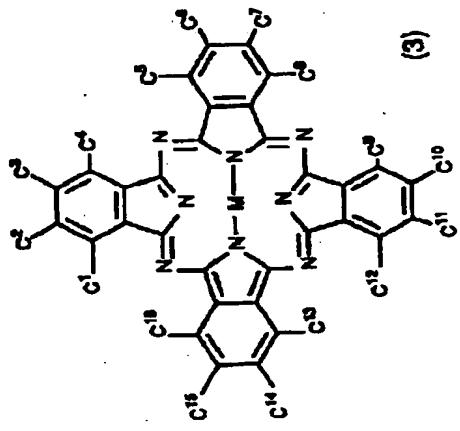

C1 - C16 = H, halogen, subst. or unsubst. alkyl, alkoxy, aryl,
aryloxy, alkylthio, arylthio;
M = metallic atom of 2 values, subst. metallic atom of 3 or 4 values
or oxy metal.
D¹ - D²⁴ = H, halogen, subst. or unsubst. alkyl, alkoxy, aryl,
aryloxy, alkylthio, arylthio;
M = metallic atom of 2 values, subst. metallic atom of 3 or 3 values

or oxy metal.

USE

The security ink print is used for preventing faking of prepared
cards, merchandise bonds or bonds by detection of near infrared ray.

ADVANTAGE

The security ink print can have excellent light resistance.

(11pp104DwgNo.0/0)

JP 07164729-A